

\$3.00



July 1981


No. 1


TABLE OF CONTENTS

Contributing to Micro Cornucopia	3
Power to the Big Board	4
Ram Protection Circuit.....	6
Video Wiggle.....	6
Disk Formatter & Listing.....	7
PFM-80 Monitor & Listing	9

REGULAR FEATURES

Letters.....	2
New Products	2
Notes from Garland	3
Book Reviews	5

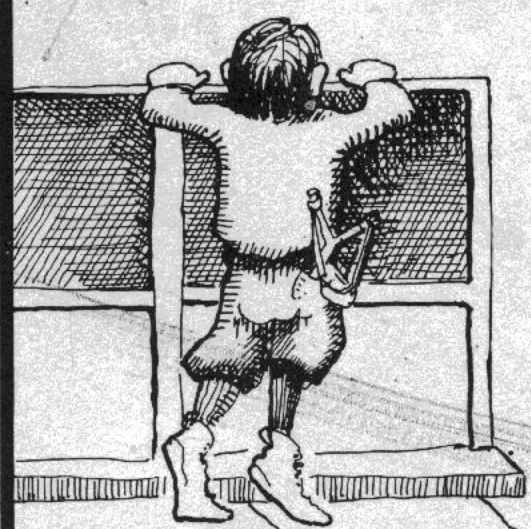

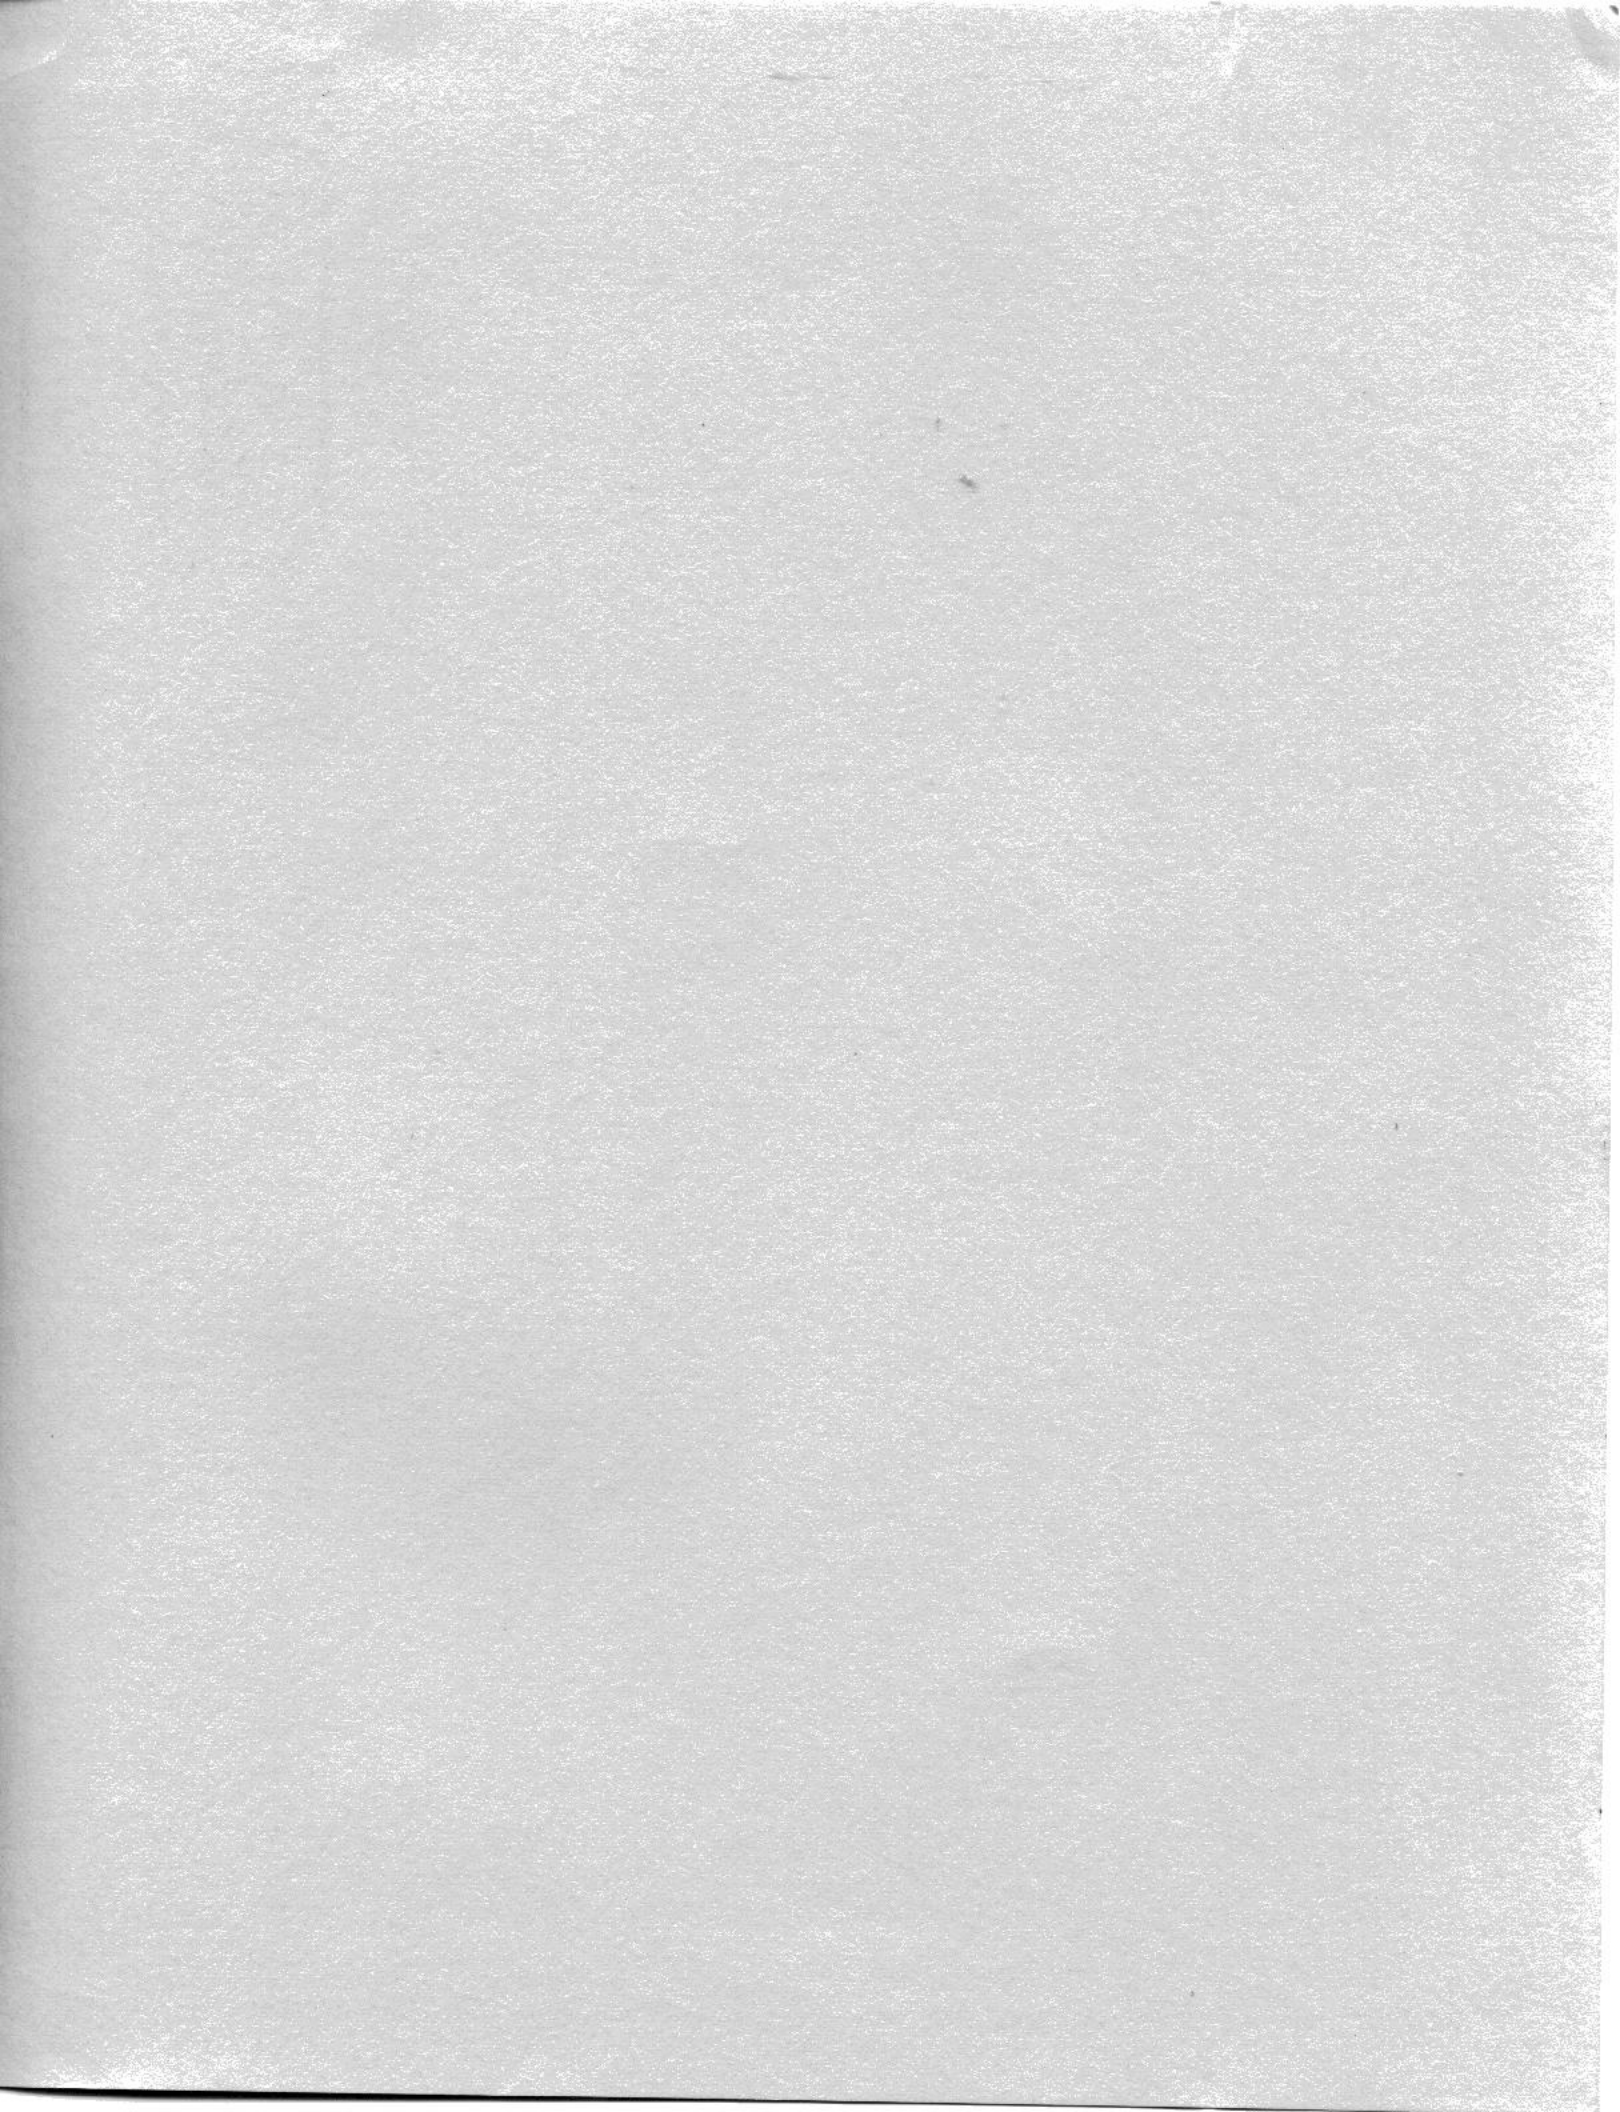

MICRO CORNUCOPIA

MICRO CORNUCOPIA
11740 N.W. West Road
Portland, Oregon 97229
503-645-3253

Editor & Publisher

David J. Thompson

Technical Editor

Ruth Fredine-Burt

Graphic Design

Sandra Thompson

Typography

Patti Morris & Martin White
Irish Setter

Cover Illustration

Gerald Torrey

MICRO CORNUCOPIA is published six times a year by Micro Cornucopia of Oregon, 11740 N.W. West Road, Portland, Oregon 97229.

SUBSCRIPTION RATES:

1 yr. (6 issues)	\$12.00
1 yr. (Canada)	\$15.00
1 yr. (other foreign)	\$20.00

All subscription orders payable in United States funds only, please.

ADVERTISING RATES: Available on request.

CHANGE OF ADDRESS: Please send old label and new address.

SOFTWARE, HARDWARE, AND BOOK VENDORS: Micro Cornucopia is establishing a group of reviewers. We would very much like to review your Big Board compatible products for Micro C. Please send material to Review Editor, Micro Cornucopia.

WRITER'S GUIDELINES: All items should be typed, double-spaced on white paper or better yet, on disk. (Your disk will be returned promptly.) Payment is in contributor's copies.

LETTERS TO THE EDITOR: Please sound off.


CP/M is a trademark of Digital Research, Inc.

Copyright 1981 by Micro Cornucopia.
All rights reserved.

July 1981

The Journal of the Big Board Users

No. 1

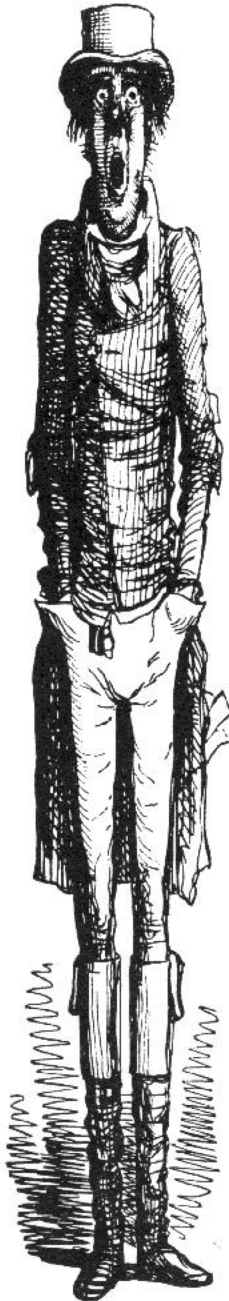

Hi, Y'all!

Welcome to the Premier Issue!

It was hard to imagine what this magazine would even look like on March 15th when we decided to start a publication supporting the Big Board. And now it's really exciting to see it take form.

Starting a new magazine is kind of a scary thing. You need interesting things to put in magazine so people will want to read it. You need people willing to take a chance and subscribe to a new publication, sight unseen. You need lots and lots of hours alone, staring at a video monitor, trying to generate ideas and direction. You need people who are willing to donate time and ideas to a dream. And you need a wife who is not only understanding but who does graphic design, accounting, paste-up, technical illustrating and schematic drafting. So thanks to all you folks, I get to say "Welcome."

Our typesetters, Patty Morris and Martin White are super people to work with (they are getting a Big Board to use for text editing). And Ruth, our technical editor is probably as excited as anyone about Micro C.

Then there are the people who have already submitted material for publication. I talked to Don Retzlaff while I was still deciding whether or not to jump in. His excitement about a user's group and his offer to write some very interesting things really made a publication look feasible. Don's first article appears in this issue. Thanks Don.

John Jones wrote such interesting things on his subscription form that I had to call him. He has a number of useful utilities, including the disk formatting program in this issue. More from John in future issues.

Plus, I have just received a really incredible disk from AB computers including a complete hardware and software interface for minifloppies, a reverse video cursor, and more. Stay tuned, because these super people, and you, are doing some great things with the Big Board.

David Thompson
Editor & Publisher

Dear Editor,

I am thinking of using one parallel port as an address bus to tell peripherals when to access the other parallel port. One bit would set the direction and then seven bits would remain to address up to 128 peripherals. These could include A/D's, D/A's, plotters, CRT vector graphics, and so on. I would like to see a standard scheme so we can trade designs within the group.

Frank Gentges
9251 Wood Glade Dr
Great Falls, VA 22066

Editor's Note:

I think Frank has an excellent idea. In fact, how does everyone feel about using port A for data and port B for address and control? Bit 7 (PB7) on port B could be the control bit. What say?

What would be super now, would be for someone to write a simple little general purpose parallel port driver that would reside up with the PFM monitor and could be called via the CP/M punch or directly. If someone did such a thing, it would run in the September issue, guaranteed.

And, if someone came up with a latch for translating 8 bits of port A into 16 bits of address and 8 bits of data why there'd be the start of a PROM burner or an S-100 bus interface etc.

Dear Folks,

I would like to locate Jim Rea, designer of PolyVue/80 or Micro Concepts the outfit that marketed Poly Vue. Has anyone done a modem interface for SIO port A? Or, has anyone configured Modem7 from the CPMug for the Big Board?

The Editor.

Dear Editor,

Why doesn't "clear to end of screen" work on the three boards I've seen?

Cole Chevalier
17862 Fitch
Irvine, CA 92714

Dear Editor,

I need: (1) modem driver for BB, (2) parallel printer driver, (3) to contact other users in my local area.

Daryl Coulhart
532 Lake Bayview Ct
Shoreview, MN 55112

VEDIT—Text editor.

I have Vedit up and running on my Big Board and once you figure out a couple of idiosyncrasies it is easy to customize and install. Get the CRT version rather than the memory mapped and just follow the directions for the ADM-3A.

However: Do not enter "Carriage Return" for the "COMMON 2ND CHARACTER IN THE ESCAPE SEQUENCE." The only character I've found that works is ESC (again). After this you have to use ESC W or something rather than ESC ESC to leave visual mode, and for some reason you have to use the default for the "command iteration brackets." These brackets are < and > rather than [and] by the way.

Once you have it up and running, however, it is a small (10K), but very powerful text editor. (I am using it now to do my text editing).

SMALL C and SMALL C+

If you want to get your feet wet in C and still generate source code that will run on PDP-11s running Bell Labs' C, then these two packages are worth considering. I purchased Small C from the Code Works, Box 550 Boleta, CA 93017. I mean, \$15 for a CP/M disk—how could I go wrong? It is neat, kind of like starting out using integer basic. Plus, it is public domain! Several of the fellows at Tektronix are working on it now, doing some optimizing, etc. The printed document is pretty minimal but when combined with the book, "The C Programming Language" by Kernighan and Ritchie, it is sufficient. The source for Small C, also written in Small C (it compiles itself) is also on the disk. Small C generates assembly code which can be assembled by ASM.

I picked up Small C+ at the Computer Faire from Alpha Omega Computer Systems. P.O. Box U, Corvallis, OR 97330. They say they have fixed numerous bugs in Small C and have added for-loops, do-while, and case statements, among other things. Small C+ requires M80 and L80 to compile the assembly code it generates.

Since small C+ is also public domain, I plan to make it available as part of a group exchange disk. Small C+ also compiles itself and can be compiled by the original Small C. The source and the documentation are on the disk. Two programmers at Alpha Omega did the extension pretty much as a personal project and I hope to talk to them about Small C+ in the near future.

PASCAL/MT+

I learned Pascal on a big system, I mean a BIG system (60 bits/word), and after using some of the small subset languages commonly available for micros (Small C, ALGOL/M, ...) I didn't really expect much more than a usable subset of Pascal. I was wrong. Pascal/MT+ is playing with a full deck.

I have tried it on some small "gee I wonder if it will" type programs, and it did. Hopefully I will have a chance to look at it more thoroughly in the near future. Manual and all, it is an impressive package. MT Microsystems has also put out an editor and debugger package to use with Pascal/MT+ (I've heard). If it is anything like the language package, the combination should be hard to beat for someone doing serious application programming. Contact MT Microsystems, 1562 Kings Cross Dr., Cardiff-by-the-sea, CA 92007.

Crowe Z80 Assembler

Byte's Nybbles made available a Z80 assembler by Patrick Crowe. The assembler uses standard Zilog Z80 mnemonics as defined in the "Zilog Z-80 Assembly Language Programming Manual." Byte originally made this program available for \$4.00 as a printed listing. I'm checking now to see if it is still available or if we can make it available, this time on disk instead of as a 60-page listing.

What makes this piece of software particularly interesting is that John Jones did the I/O linking for the Big Board and has supplied the source of that. And it works very well. More about all this as I get information from Byte. (All kinds of exciting things! Thanks, John.) ■ ■ ■

Now for the news you have all been waiting for, the latest, greatest from Digital Research Computers.

New ROMs for old.

Jim Tanner is now shipping the Big Board with character ROMs created by yours truly. And, he will reburn (for free) any of the old style upper case and smaller upper case ROMs you send him. If you can't part with your old character ROM for a few days then send him \$10.00 and he will send you a new ROM.

New video rocks for free.

For those of you who haven't appreciated the wiggle you get on the video display, here's relief. (No, you don't have to give up drinking.) Any registered owner who sends in his serial number and date of purchase to Jim will receive, free, a 13.9776 MHZ crystal. Take out the old 14.318 video crystal and replace it with the new one and the wiggle will be gone. Not even a genie could do better than that.

4 MHz the easiest way of all.

- Step 1. Remove U96
- Step 2. Jumper what was pin 4 of U96 to pin 4 of U97.
- Step 3. DON'T replace U96.

That's it, no crystals to buy and no board runs to cut. However, it won't work on all boards because of the precharge requirements on the RAM.

First of all, you probably need 200ns RAM chips. Big Boards have been shipped with 300ns, 250ns, and 200ns chips. About 40% were 300ns, 40% 250ns, and the other 20% were 200ns. This mod generates a clock that is more like 60/40 rather than 50/50 High/Low so even the 200ns RAM is just barely making it.

Out of three boards that they have modified at Digital Research two worked and one didn't, though they all had 200ns RAM. On most of the boards it is pretty easy to tell how fast the RAM is. The number on the chip will be 4116-X where X is probably 20, 25 or 30. 20 stands for 200ns, 25 stands for 250ns and 30 stands for 300ns. The National chips have a -4

(continued next column)

How do you contribute to Micro C? What are we interested in? What should you send, disk, printer output, post card, papaya leaf? What if you can't write? What if the thing you are doing is pretty basic or maybe too advanced? Well, here is the information.

Form: Send articles on paper, (double-spaced) or, even better, on disk. If you send a disk, we will copy the contents of the latest Big Board user's group disk onto your disk before we return it.

It's easier on us if you don't include any formatting characters in the text. These characters may help your text formatter but they have to be removed before Patti and Martin can typeset the article.

Programs: Here a disk is a super way to go. Please include at least a few paragraphs of introduction. If the program requires compiling or

Notes from Garland continued

for 250ns and a -3 for 200ns. Any others you should look up in a parts book.

If you are among the folks who have done a successful mod to speed up the Big Board, please send it in and I'll publish it (for those of us who don't have 200ns RAM or can't get this mod to work). In fact, if I get 20 different mods for speeding up the Big Board, I'll publish them all. Why not?

Double double density density.

Jim has someone working on a three-chip board which will plug into the 1771 socket. It will do single and double density on 8 inch and mini floppies (according to Tanner). I would guess that they are aiming for availability sometime late summer or early fall but no one's making any promises.

The chips will be Western Digital and the main controller will be the 1795. (Hooray, it's NOT the 1791.) Perhaps those of you struggling with the idiosyncrasies of the 1791 should write to Western Digital for a new data book.



assembling please include a COM file along with the source. And if the compiler or assembler is public domain please include it and anything else needed to do the compilation. Most of the software contributed will be placed in a group disk and made available to everyone in the group.

Personal information: Please include some information about yourself (like raising bees and running your big board off wind power) and about how you are using the Big Board.


What to write about: We're looking for anything on the following list, along with just about anything not on the following list.

- **Hardware interfacing**, complete with schematics (we can redraw them if it's needed) and comments about what the circuit does and how it does it.
- **Software drivers** or other mods to the operating system. This time include a listing, etc. (See "Programs" above.)
- **Reviews of software** take a critical look at how easy it is to learn, how powerful it is, and how easy it is to use once you've learned it. Note: part of the user interface is determined by the quality of the documentation and part by the structure of the software.
- **Reviews of languages** take a critical look at the language for particular applications, systems, etc. What are its weaknesses (size, speed) and it's strengths (floating point, string manipulation, documentation, for instance). The primary languages I'm looking for are, C, Pascal, assembly, Fortran, Forth, Lisp, APL, ADA.
- **Inside scoops** on the latest, greatest rumors from the industry. It sometimes takes a little yellow journalism to keep the industry on its toes. If you would like to use a pen name like ZOSO does, let me know and presto, the Micro Cornucopia shadow can strike fear into the hearts of those wearing their three-piece-vested-interests.
- **And anything else** (which covers a lot of things).



Power to the Big Board

By David Thompson

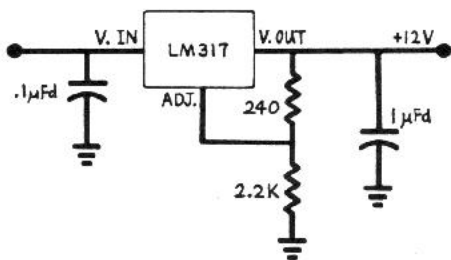

Schematic of +12V Regulator

Picking a power supply these days can be a problem. Everyone and his kid brother are building them in variations that read like the marquee at an ice cream parlor. So the following may be a little help, both in the selection of a supply and in understanding the consequences of a poor choice.

A group of us in Portland are using the Power One model CP 384. This is a simple linear supply with three outputs, +5V at 9 amp, -12V at about an amp, and +24V at .7 amp average or 5 amp peak. The price for this unit is about \$120 in single unit quantities. It includes over-voltage and over-current protection.


This supply is made to power 8-inch disk drives but if you add a simple 3-terminal regulator for +12V, it will also supply all the power for the Big Board.

To add +12V, tie the input of the regulator to the + lead of either of the two 60V electrolytics. The connecting post marked 24V return is ground (in fact, I just tied all the return posts together and ran them to the aluminum frame on the supply). The + lead on the electrolytics is at about 38V above ground which is higher than a standard 12V regulator (7812) is rated for. One member of our group is using a 7812 anyway and it is working fine. The LM317, however, is supposed to handle 38 volts just fine and it has a variable output to boot. Its output is designed to be 1.2V above the adj. lead, so by having approximately 1/10 of the drop between the output and the reference and 9/10 between the reference and ground you should get 12V. It comes out pretty close.

Mount the regulator against the frame with a mica insulator. Be sure to use silicon grease because it has to dissipate up to 13 watts.

Double check yourself.

It's a good idea to put a resistor load on the supply and then use a digital voltmeter to double check the outputs before connecting it up to your system. I have heard some pretty gruesome stories about folks accidentally putting outrageous voltages on their systems. Sometimes the systems have gone down permanently, other times they have gone temporarily insane, while a few have miraculously survived. It's best, obviously, to check the supply thoroughly.



LM 317 Regulator

Also, check to see that the supply will deliver 24V at 5 amps. The Power One's current limit is set at 1 amp at the factory. It will work in the circuit that way until you try to write something on the disk. The drive can then get very strange, generating random CRC errors and in some cases rendering a disk unusable.

If you a having drive problems, check the 24V line during a write operation. It shouldn't drop below 22V. (If the 24V line drops below 15V, you will probably get a buzz as the relay tries to load the head.)

To adjust the 24V current limit on the Power One Supply, locate the small screwdriver pot marked "24V I.LIMIT" and turn the control fully clockwise. It should now give you 5 amps at a rock solid 24V.

If you have had experience with other power supplies, let me know and I'll pass the word along here in Micro C. ■ ■ ■

Notes on Book Reviews

A good book or manual is a conversation with the author. At first it is a story, the reader sharing experiences with the author through the transparency of the written word. Later when the reader has questions about the material covered, the conversation turns to question and answer and the book becomes a reference volume.

Conversation: The tone of the conversation is very important. No one would freely choose to sit through hour upon hour of impersonal lecture if there were any easier way to get the same information. And yet some authors get mired in pages of third person passive.

Transparency: When the words move you smoothly and easily from idea to idea, then what you see are the ideas, not the words. The words have become transparent. If the sentences are too long and confusing or are short. Choppy. Broken up. Or if the ideas don't fit well together, then the conversation is reduced to one word at a time.

Asking questions: Technical books are generally used for two primary purposes. First, they are learning tools (the original conversation) and second, they are references as questions arise. Many technical books are arranged as training manuals only or as reference manuals only (sometimes for very good reason).

For instance, Microsoft's Basic 80 manual is primarily an alphabetical list of commands, which is fine if you know what commands you need to use and just need syntax examples. Kernighan and Ritchie's C book, on the other hand, is a well written introduction to the language, but if you want to look up a command you will have to start at the index and then refer to three or more places scattered through the book. At least they did an index.

And finally all the things you normally notice when reading a book:

- Content. Is the information appropriate to this group. Is the book a bargain in terms of information content.

(continued next page)

Three Books on CP/M

David Thompson Reviews

**Using CP/M,
A Self-Teaching Guide**
by Fernandez and Ashley
John Wiley & Sons
ISBN 0 471 08011-X

"Using CP/M" is the book that introduced me to CP/M. I purchased this text immediately after ordering the Big Board and by the time I had my system running I was pretty comfortable with the simpler portions of its operating system. But then I had already read the book cover to cover at least three times in anticipation.

The authors use an informal, conversational, writing style that's clear and easy to read. The text comes in short chunks. Each half-page or so, is followed by approximately a half-page of questions about the material just covered. I just skipped the questions, which meant that I skipped about half the total book. If you're really into questions you can use mine.

The book starts at a beginning level and stays there. It goes over and

over the basics; spending 9 pages, for instance, on how to enter generalized filenames (*.*) . And then it covers DDT in 10 lines.

Graphically speaking, "Using CP/M" doesn't make it. The writers organized the material pretty well but that organization disappears into a forest of sameness. Even the question sections are not visually separated well from the text, so it is sometimes hard for your eye to skip to the next piece of text. And skimming through the text to find a particular command is nearly impossible.

The only prayer this book has as a reference is the index. But if something didn't make the index you're in real trouble. Try to find the CP/M line editing commands (not ED). I gave up trying.

All in all, this text is reasonable for someone who is just starting out and wants to do a lot of light reading.



The CP/M Handbook with MP/M
by Rodnay Zaks
Sybex
ISBN 0 89588 048 2

I got "The CP/M Handbook" after trying to use "Using CP/M" for a reference, so most of my experience with this text is for reference work. It's a real improvement. This book is full of tables, charts, reference guides and appendices. The chapters are organized in logical manner. The design and many illustrations (and index) help the reader locate specific information.

All of Zak's books that I've seen have been easy to read. The book starts at a beginning level and then progresses to to such things as reconfiguring CP/M for different system sizes. Advanced topics such as DDT and ASM, however, are covered just enough for the reader to access the programs. DDT gets about 2½ pages and ASM gets about 3. The reader is then referred to the user's guide from Digital Research.

This is a good text for someone using CP/M for running applications

programs. PIP is pretty thoroughly covered in its own chapter and ED gets the detailed look it needs to keep the reader from losing his cursor entirely. So, for those not digging heavily into CP/M itself, this book is a definite option.



Osborne CP/M User Guide
By Thom Hogan
Osborne McGraw-Hill
ISBN 0 931988-44-6

The "Osborne CP/M User Guide" is the latest book to jump on the CP/M bandwagon and is the most technical of the three books. The introduction for beginners is relatively brief; and PIP, for instance, is presented in 21 pages of formatted text rather than a chapter in standard paragraph form.

This book contains a complete chapter on assembly language utilities, a subject skimmed over by the other texts. In fact, DDT and ASM each get 12 pages of remarkably thorough coverage. Like the Sybex book, Hogan makes extensive use of appendices for command summaries, etc. but he also adds some extra goodies like an annotated bibliography and addresses of companies supplying CP/M based products. (Hooray!)

Hogan's writing style is variable. Generally it is friendly but there are places where it is more formal than Zaks or Fernandez/Ashley. And he uses very few illustrations. However, the graphic layout of the material is very well done. In fact, you probably won't notice the dearth of illustrations because of the excellent use of type and layout to make the organization obvious. The combination of graphic design and index make this a first class reference work for CP/M.

This book is definitely the best book I've seen for someone using CP/M on a day-to-day basis. A beginner, however, might seriously consider starting with Zaks' book and then moving up to this one as he gains experience.



Notes on Book Reviews continued


- Organization. Is the way the author progresses into the subject obvious? Is it easy to go back and find the information you need?
- Graphic design. Is the book visually appealing? Can you skim through glancing at the headlines and the illustrations and follow the book's progression through the subject?
- Illustrations. Are the illustrations well thought out and technically accurate or just afterthoughts to pretty up the page?
- Author's command of the subject. It's fun to catch a mistake in print. It's sort of like Moses messed up when chipping the rock, but too many errors cast doubt on the validity of the whole book.

So if you have books that are interesting to you and might be interesting to others in the group then by all means put the information down on a disk or paper or post card or whatever and let us know.



RAM Protection Circuit

By David Thompson

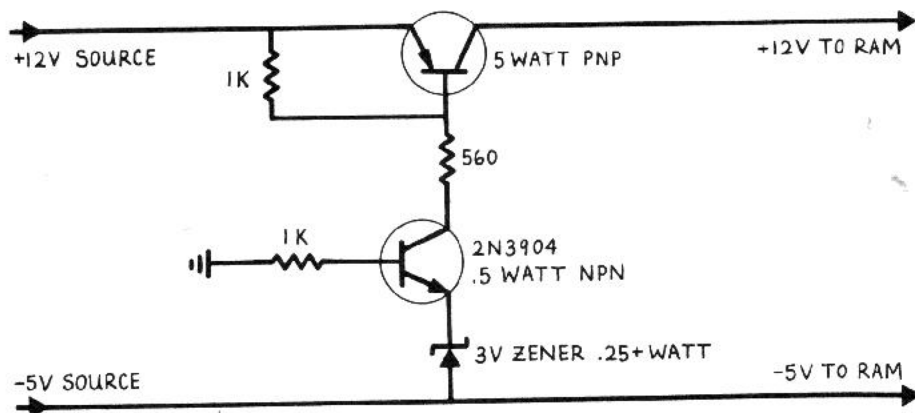

Schematic of RAM Protection Circuit

The RAM chips used on the Big Board (4116s) require three voltages for operation, +5V, +12V and -5V.

The +5V and +12V are used for device operation while the -5V provides an internal protective bias to keep the +12V from breaking down the chip. Isolation between some regions is provided by reverse biased diode junctions and the -5V provides the reverse bias.


So, the device manufacturers strongly recommend that the -5V be available before the +12V. And they recommend that the -5V be available after the 12V goes away.

Most personal computers (TRS-80 etc.) have gotten around the problem by providing a slightly longer time constant for the +12V on power-up and a shorter time constant on power-down. But if the -5V supply ever shuts down momentarily or doesn't come up for some reason then the owner gets to buy new RAM. The Big Board, on the other hand is at the mercy of the supply.

The documentation recommends that you use a quality supply but there are many other reasons why -5V might not be available.

The following circuit takes care of the problem and has already saved our group a couple of sets of 4116s. The parts are mounted on the underside of the board and only one run (the +12V) has to be cut. Nothing is critical. The NPN is just a small, plastic, half-watt transistor with a DC gain of about 100. The PNP is a larger tab-style package and has a DC gain of 10 or more. Since the PNP is either saturated or off, it doesn't dissipate enough to require heat-sinking.

It is easy enough to check the whole thing out on the bench before installing it on the Big Board. When the -5V line drops down to about -3.5V the NPN should stop pulling current out of the base circuit of the PNP. As the PNP base rises, the PNP shuts off, removing the +12V from the RAM. ■ ■ ■

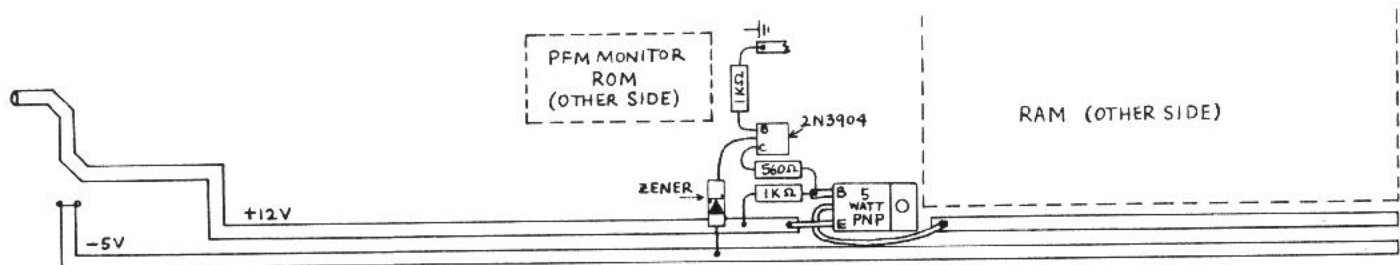

Example Installation of RAM Protection Circuit

Video Wiggle

The Cause and Cure

Quite a number of folks have noted on their subscription forms that they are bothered by wiggle on their video displays.

Well, the wiggle is caused by a frequency difference between your power line and the vertical output in the video generator. The video generator is 1 Hertz off (It's 61 Hz) and when it beats against power supply ripple in a Leedex monitor (for instance) you get wiggle. Many monitors also have trouble maintaining vertical sync because the frequency is outside their normal operating range.

To completely cure the problem, change the frequency of the CRT display generator crystal. Jim Tanner now has new crystals available free for Big Board owners. See "Notes From Garland, Texas" for more information.

A partial cure requires adding additional power supply filtering to the monitor. One additional 6000 ufd capacitor on the 12V DC line makes quite an improvement.

On the other hand, if your monitor accepts separate vertical, horizontal, and sync signals then you probably won't have any trouble. I've tried it both ways and my ancient Tektronix monitor with its separate inputs is as solid as a rock (it's also about that heavy).



New Character ROM

Sometime after the first of this year, Jim Tanner began shipping the Big Board with a new character ROM. The ROM has true lower case characters rather than the smaller upper case/larger upper case ROM shipped in the early boards.

- The ROM uses a 5 by 8 dot matrix so it has one-dot descend-ers.
- It contains the standard character set for 00(hex) through 7F(hex). (Even though the Big Board only displays 20—7F.)
- And I like it because I designed it and gave it to Jim.
- However, It isn't perfect.

So, for a week or so I worked on the g, y, t, f, and q characters until . . . well, if it isn't perfect now, I give up because I'm absolutely tickled.

If your board has true upper/lower case but you would like to have the absolute latest greatest, then send me a ROM and \$5.00.

If you have one of the old upper case/smaller upper case ROMs you have a choice. Send a ROM to Jim Tanner at Digital Research Computers of Texas and he will burn a copy of my first character ROM (the one he's using in the new boards) for you, free. Or you can send me the ROM and \$5.00 and get the deluxe version.

Price

- \$5.00 if you send a 350ns 2716 and a self-addressed, stamped package I can ship it back in.
- Or instead of \$5.00 you can submit something to the magazine, a program, a book or software review, a schematic and comments, a page or two about what you are doing with the Big Board, etc., along with your ROM and SASE and presto, you get fame AND a new character set, free! (And those who contributed to this issue also qualify for a free burn.)

Make checks payable to Micro Cornucopia. If you don't agree that it's a \$5.00 improvement, I'll send you the \$5.00 back.

PFM-80 Monitor

By Don Retzlaff

6435 Northwood
Dallas, Texas 75225

The PFM-80 Monitor is the primary control program for your Big Board computer. It was burned into the EPROM that is installed in the first ROM socket (U67).

PFM and CBIOS were written by Russell Smith, who is an exceptional young programmer who operates his own software house in Denton, Texas. He has helped me immeasurably in understanding PFM and implementing my programs on the Big Board. As time goes on I will pass along some of this expertise to you, through this column.

If your curiosity is like mine you want to know what PFM stands for. I was informed that PFM is the abbreviation of the profound literal description of what the monitor is: "PRETTY F—KIN' MAGIC."

When the computer is turned on or the reset button is pressed, the Big Board automatically starts executing the COLD START BOOT program in the monitor ROM. The first five instructions in the ROM (starting at location 0000H) copy the PFM monitor program from the ROM into upper memory starting at location F000H and continuing through F7E6H. The RAM locations starting at location FF00H through FFA8H are used as monitor data storage locations.

After PFM has been booted into RAM the monitor starts executing and goes through the cold start initialization routine that does the following:

1. Initializes data storage pointers.
2. Clears the scratch RAM with zeros.
3. Fills CRT storage with blanks.
4. Initializes values in memory.
5. Initializes programmable I/O devices.
6. Waits for input from keyboard or terminal.
7. Sets baud rate for SIO input if input from there.
8. Displays sign-on message on the appropriate device.
9. Displays monitor prompt *
10. Waits for input.

At this point PFM is up and operating.

I think that it is important to note that whenever an RS-232 serial terminal is connected to SIO PORT B, PFM automatically determines the BAUD rate of the terminal by analyzing the input from the single carriage return. It then sets up the baud rate generator to the correct frequency.

In future articles we will get deeper into the monitor.

Now let's discuss the monitor entry point table. Starting at location F000H you will find a series of jump instructions. These provide a fixed address that can be used as entry points to the various monitor routines. These will be useful in software routines that you write. This table will provide a constant jump location for these routines even if updates are made to the monitor. Thus, changes in addresses of the internal routines will not affect your software.

I plan to cover the various features of PFM and CBIOS which work together to control your Big Board. In succeeding articles I will lead you through the assembly language listings of both PFM and CBIOS, pointing out the features of each and how you can make the most from each.

In the next issue we will discuss the mechanics of modifying the monitor.



Editor's Note: The first installment of the PFM monitor listing begins on the following page. We will continue the listing in the September issue.

PFM Monitor Listing

```

0001 :*****
0002 :*
0003 :* BIGBOARD MONITOR ROM, NON-RELOCATABLE VERSION
0004 :* Russell Smith
0005 :*
0006 :*****
0007 :
0008 :
0009 : PSECT ABS
0010 : ROM OF000H
0011 : RAM OFF00H
0012 : CRTMEM EBU 3000H
0013 :
0014 :
0015 : DRG ROM
0016 : INCLUDE INIT.ASM
0017 :*****
0018 :*
0019 :* COLD START INITIALIZATION ROUTINE FOR
0020 :* CONFIGURING THE SYSTEM AFTER A POWER-ON
0021 :* OR PUSHBUTTON RESET.
0022 :*
0023 :*
0024 :* 18-Oct-80
0025 :*
0026 :*
0027 :*-- MONITOR ENTRY POINT TABLE --
0028 :*
0029 : COLD: JP INIT
0030 : WARM: JP PROMPT
0031 : CONST: JP KBDST
0032 : CONIN: JP KBDIN
0033 : CRTOUT: JP CRTOUT
0034 : CONOUT: JP CRTOUT
0035 :
0036 : JP SIOST
0037 : JP SIOIN
0038 : JP SIOOUT
0039 : JP SELECT
0040 : JP HOME
0041 : JP SEEK
0042 : JP READ
0043 : JP WRITE
0044 :
0045 :
0046 : DO A SHORT POST-RESET TIME DELAY. ALSO INITIALIZES THE
0047 : STACK POINTER AND FILLS THE MONITOR SCRATCH RAM WITH ZEROS
0048 :
0049 : INIT: DI
0050 : LD HL,RAM
0051 : LD (HL),0
0052 : LD SP,HL
0053 : INC L
0054 : JR NZ,INIT1-$
0055 :
0056 : INITIALIZE THE Z-80 FOR INTERRUPT MODE #2
0057 :
0058 : LD A,H

```

```

F08A 21CAF0
F08B 23
F08E 17
F08F 30FC
F091 7E
F092 D30C
F094 CDF0F4
F097 3E01
F099 D307
F09B 3E1C
F09D D307
F09F 21FEF4
F0A2 220DF0
;
0122 BAUD3:
0123 BAUD3:
0124 RLA
0125 JR
0126 LD
0127 OUT
0128 CALL
0129 LD
0130 OUT
0131 LD
0132 OUT
0133 LD
0134 LD
;
0135 ;
0136 ;PRINT SIGNON MESSAGE
0137 ;
0138 SIGNON: EI
0139 CALL FNEXT
0140 DEFM CR,LF
0141 DEFM '... system monitor 3.3 ...'
73797374
656D206D
6F6E6974
6F722033
2E33202E
2E2E
F0C5 0D0A
F0C7 04
F0C8 C303F0
;
0142 DEFS CR,LF
0143 DEFB EOT
0144 WARM
0145 ;
0146 ;
0147 ;
0148 ;BAUD RATE CONSTANTS FOR COM 8116 BAUD RATE GENERATOR
0149 ;
0150 RATES: DEFB 0101B ; 300 BAUD
0151 DEFB 0110B ; 600 BAUD
0152 DEFB 0111B ; 1200 BAUD
0153 DEFB 1010B ; 2400 BAUD
0154 DEFB 1100B ; 4800 BAUD
0155 DEFB 1110B ; 9600 BAUD
0156 DEFB 1111B ; 19200 BAUD
0157 DEFB 1111B ; 19200 BAUD
0158 ;
0159 ;
0160 INTAB EQU $ ;INITIALIZATION DATA TABLES
0161 ;
0162 ;
0163 ;INITIALIZE THE Z-80 I/O REGISTER INTERRUPT VECTOR TABLE
0164 ;
0165 DEFB 2
0166 DEFW SYSVEC+2
0167 DEFW KEYSRV ;PARALLEL KBD INTERRUPT VECTOR
0168
0169 DEFB 2
0170 DEFW CTCVEC+6
0171 DEFW TIMER ;1 SEC TIMER INTERRUPT VECTOR
0172
0173 DEFB 4
0174 DEFW SIOVEC+4
0175 DEFW SIOINT ;SIO RECEIVE INTERRUPT VECTOR
0176 DEFW SIDERR ;SIO PARITY, OVERRUN & FRAPING ERROR
;
0177 ;
0178 ;INITIALIZE DISK I/O DRIVER VARIABLES
0179 ;
0180 DEFB 8
F0E4 0B

```

HL,RATES-1
HL ; INDEX INTO BAUD RATE TABLE
; USING COUNT DERIVED IN A
NC,BAUD3-\$
A,(HL)
;GET BAUD RATE CONTROL BYTE FROM
(BAUDR),A ;TBL & OUTPUT TO COM-8116 TIMER
SIOIN ;DISCARD 1ST SERIAL INPUT CHAR
A,1
(SIOCPB),A ;RE-PROGRAM SIO B TO GENERATE
A,0001100B;INTERRUPTS ON RECEIVED DATA.
(SIOCPB),A ;PARITY DOES NOT AFFECT VECTOR
HL,SIOOUT
(CONOUT+1),HL ;RE-DIRECT CONSOLE OUTPUT
TO SIO

PFM Monitor Listing (continued)

```

0244 ; INITIALIZE CHANNELS 2 AND 3 OF THE CTC
0245 ; TO GENERATE ONE SECOND INTERRUPTS FROM CTC3
0246 ;
0247 CTC0 EQU CTC+0 ; CTC CHANNEL 0 PORT#
0248 CTC1 EQU CTC+1 ; CTC CHANNEL 1
0249 CTC2 EQU CTC+2 ; CTC CHANNEL 2
0250 CTC3 EQU CTC+3 ; CTC CHANNEL 3
0251
0252 DEF B 1,CTC0 ;BASE INTERRUPT VECTOR FOR CTC
0253 DEF B CTCVEC
0254 ;
0255 DEF B 2,CTC2 ;PUT CTC2 IN TIMER MODE
0256 DEF B 001000111B ;CTC2 PERIOD=105*256**400 NS
0257 DEF B 105
0258 ;
0259 DEF B 2,CTC3 ;PUT CTC3 IN COUNTER MODE
0260 DEF B 110000111B ;CTC3 PERIOD=999936 uS
0261 DEF B 93
0262 ;
0263 ;
0264 ; INITIALIZE SID CHANNEL B FOR ASYNCHRONOUS SERIAL
0265 ; INTERFACE TO PRINTER OR TERMINAL
0266 ;
0267 SID0PA EQU SID+0 ;SID DATA PORT A
0268 SID0PB EQU SID+1 ;SID DATA PORT B
0269 SID0CA EQU SID+2 ;SID CONTROL/STATUS PORT A
0270 SID0CB EQU SID+3 ;SID CONTROL/STATUS PORT B
0271
0272 DEF B 1,BAUDEB ;SET COM 8:16 TO 300 BD DEFAULT
0273 DEF B 0101B
0274
0275 DEF B 11,SID0CB ;SELECT REGISTER #4
0276 DEF B 4 ;16X CLK,1 STOP,BIT,ODD PARITY
0277 DEF B 010000101B ;STATUS REGISTER #1
0278 DEF B 1 ;STATUS AFFECTS VECTOR,
0279 DEF B 000000100R ;NO INTERRUPTS
0280 DEF B 3 ;SELECT REGISTER #3
0281 DEF B 010000001B ;7 BITS/RX CHAR
0282 DEF B 5 ;SELECT REGISTER #5
0283 DEF B 10101010B ;7 BITS/TX CHAR, ASSERT DTR
0284 DEF B 2 ;SELECT REGISTER #2
0285 DEF B SID0VEC ;LOAD INTERRUPT VECTOR BASE
0286 DEF B 2 ;SELECT READ REG#2 FOR SID TEST
0287
0288 DEF B -1 ;END-OF-TABLE
0289 ;
0290 ; INIT DONE
0291 ;
0292 ;
0293 ;
0294 ;***** INCLUDE MONITOR.ASM *****
0295 ;
0296 ; BASIC HEX MONITOR FOR Z-80 PROCESSORS
0297 ; 3-Aug-80
0298 ;
0299 ;*****
0300 ;
0301 ;
0302 ;
0303 ;

```

```

F19F 20F3
F1A1 BDF1
>0021
0366
0367
0368
0369 CMTSIZ EDU $-CMTD TAB
0370 ;
0371 ;
0372 ;*****
0373 ; MONITOR COMMAND ACTION ROUTINES PACKAGE
0374 ;
0375 ;
0376 ;*****
0377 ;
0378 ;
0379 ;
0380 ;
0381 ; -- DISK BOOT LOADER COMMAND --
0382 ;
0383 ;
0384 ROOT: LD C,0 ;SELECT DRIVE 0 FOR BOOT LOAD
0385 CALL SELECT
0386 NR,DSKERR-$
0387 CALL HOME ;HOME HEAD TO TRACK 0
0388 NR,DSKERR-$ ;ERROR IF NOT READY OR AT TR0
0389 HL,0080H ;POINT TO CP/M READ BUFFER
0390 C,1 ;SELECT SECTOR 1
0391 CALL READ ;READ TRACK 0/ SECTOR 1
0392 NR,DSKERR-$
0393 JR AF ;CLEAN UP STACK
0394 F0080H ;60 EXECUTE LOADER
0395 ;
0396 ;
0397 ; -- DISK SECTOR READ COMMAND --
0398 ;
0399 DSKCMD: CP 3 ;CHECK PARAMETER COUNT
0400 SCF
0401 RET
0402 LD C,L ;USE FIRST ARG AS UNIT#
0403 CALL SELECT
0404 NR,DSKERR-$
0405 HL,PARAM2
0406 C,(HL) ;USE SECOND ARG AS TRACK#
0407 CALL SEEK
0408 NR,DSKERR-$
0409 HL,PARAM3 ;USE THIRD ARG AS SECTOR#
0410 C,(HL)
0411 LD HL,0080H
0412 CALL READ
0413 SET 0,A ;MARK ERROR BYTE AS DUE TO READ
0414 NR,DSKERR-$
0415 LD HL,0080H
0416 DE,B
0417 JP DUMP ;DUMP DISK READ BUFFER & RETURN
0418 ;
0419 ;
0420 DSKERR: LD C,A ;SAVE 1771 STATUS
0421 PNEXT
0422 DEF M 'disk error'
0423
0424
0425 DSKR2:
0426 RL
0427 ADC A,'0' ;TRANSFORM A INTO ASCII:11 OR 0'0'
0428 CALL OUTPUT
0429 DJNZ DSKR2-$ ;REPEAT FOR 8 BITS
0430 OR A
0431 RET

```



```

F12B CDECF3 0304 PROMPT: CALL FNEXT
F12E 000A 0305 CR,LF
F130 2A20 0306 DEFN
F132 04 0307 DEFN
F133 2186FF 0308 HL,LINBUF
F136 0E20 0309 LD
F13B C03BF3 0310 CALL
F13B 3035 0311 JR
      0312
F13D AF 0313 XOR
F13E 3284FF 0314 LD
F141 CDFCF3 0315 CALL
F144 348BFF 0316 LD
F147 FE0D 0317 CP
F149 28E0 0318 JR
F14B 2182F1 0319 Z,PROMPT-$ ;JUMP IF A NULL LINE
F14E 010B00 0320 HL,CMDTAB ;SEARCH FOR A MATCHING CHAR
F151 C060F3 0321 CALL BC,CMD5IZ/3 ; IN COMMAND SEARCH TABLE
F154 201C 0322 JR
F156 C5 0323 NZ,WHAT-$ ;TRY AGAIN IF SEARCH FAILS
F157 FD2189FF 0324 PUSH BC
F15B C06AF3 0325 LD IV,LINBUF+1
F15E DDE1 0326 CALL PARAMS
F160 3810 0327 JR C,WHAT-$ ;INPUT NUMERIC PARAMETERS FROM
F162 2470FF 0328 LD HL,(PARAM1) ; LINE BUFFER AND TEST IF ERROR
F165 ED5B7E0F 0329 LD DE,(PARAM2)
F169 ED4B80FF 0330 LD BC,(PARAM3)
F16D C080F1 0331 CALL
F170 30B9 0332 JR NC,PROMPT-$;GO BACK TO PROMPT IF NO ERRORS
      0333
F172 CDECF3 0334 WHAT:
F175 20776861 0335 DEFN
      74203F
F17C 07 0336 DEFB
F17E 04 0337 DEFB
F17E 18AB 0338 JR
      0339 ;
F180 DDE9 0340 ;
      0341 CALLX: JP (IX)
      0342 ;
      0343 ;
      0344 ;
F182 52 0345 CMDTAB: DEFB
F183 4F 0346 DEFB
F184 49 0347 DEFB
F185 47 0348 DEFB
F186 54 0349 DEFB
F187 46 0350 DEFB
F188 4D 0351 DEFB
F189 43 0352 DEFB
F18A 42 0353 DEFB
F18B 44 0354 DEFB
F18C 53 0355 DEFB
      0356
F18D 29F3 0357 DEFN
F18F 05F2 0358 DEFN
F191 A3F1 0359 DEFN
F193 E6F2 0360 DEFN
F195 57F2 0361 DEFN
F197 DBF2 0362 DEFN
F199 8CF2 0363 DEFN
F19B 81F2 0364 DEFN
F19D FEF2 0365 DEFN
      0366
      0367
      0368
      0369
      0370
      0371
      0372
      0373
      0374
      0375
      0376
      0377
      0378
      0379
      0380
      0381
      0382
      0383
      0384
      0385
      0386
      0387
      0388
      0389
      0390
      0391
      0392
      0393
      0394
      0395
      0396
      0397
      0398
      0399
      0400
      0401
      0402
      0403
      0404
      0405
      0406
      0407
      0408
      0409
      0410
      0411
      0412
      0413
      0414
      0415
      0416
      0417
      0418
      0419
      0420
      0421
      0422
      0423
      0424
      0425
      0426
      0427
      0428
      0429
      0430
      0431
      0432
      0433
      0434
      0435
      0436
      0437
      0438
      0439
      0440
      0441
      0442
      0443
      0444
      0445
      0446
      0447
      0448
      0449
      0450
      0451
      0452
      0453
      0454
      0455
      0456
      0457
      0458
      0459
      0460
      0461
      0462
      0463
      0464
      0465
      0466
      0467
      0468
      0469
      0470
      0471
      0472
      0473
      0474
      0475
      0476
      0477
      0478
      0479
      0480
      0481
      0482
      0483
      0484
      0485
      0486
      0487
      0488
      0489
      0490
      0491
      0492
      0493
      0494
      0495
      0496
      0497
      0498
      0499
      0500
      0501
      0502
      0503
      0504
      0505
      0506
      0507
      0508
      0509
      0510
      0511
      0512
      0513
      0514
      0515
      0516
      0517
      0518
      0519
      0520
      0521
      0522
      0523
      0524
      0525
      0526
      0527
      0528
      0529
      0530
      0531
      0532
      0533
      0534
      0535
      0536
      0537
      0538
      0539
      0540
      0541
      0542
      0543
      0544
      0545
      0546
      0547
      0548
      0549
      0550
      0551
      0552
      0553
      0554
      0555
      0556
      0557
      0558
      0559
      0560
      0561
      0562
      0563
      0564
      0565
      0566
      0567
      0568
      0569
      0570
      0571
      0572
      0573
      0574
      0575
      0576
      0577
      0578
      0579
      0580
      0581
      0582
      0583
      0584
      0585
      0586
      0587
      0588
      0589
      0590
      0591
      0592
      0593
      0594
      0595
      0596
      0597
      0598
      0599
      0600
      0601
      0602
      0603
      0604
      0605
      0606
      0607
      0608
      0609
      0610
      0611
      0612
      0613
      0614
      0615
      0616
      0617
      0618
      0619
      0620
      0621
      0622
      0623
      0624
      0625
      0626
      0627
      0628
      0629
      0630
      0631
      0632
      0633
      0634
      0635
      0636
      0637
      0638
      0639
      0640
      0641
      0642
      0643
      0644
      0645
      0646
      0647
      0648
      0649
      0650
      0651
      0652
      0653
      0654
      0655
      0656
      0657
      0658
      0659
      0660
      0661
      0662
      0663
      0664
      0665
      0666
      0667
      0668
      0669
      0670
      0671
      0672
      0673
      0674
      0675
      0676
      0677
      0678
      0679
      0680
      0681
      0682
      0683
      0684
      0685
      0686
      0687
      0688
      0689
      0690
      0691
      0692
      0693
      0694
      0695
      0696
      0697
      0698
      0699
      0700
      0701
      0702
      0703
      0704
      0705
      0706
      0707
      0708
      0709
      0710
      0711
      0712
      0713
      0714
      0715
      0716
      0717
      0718
      0719
      0720
      0721
      0722
      0723
      0724
      0725
      0726
      0727
      0728
      0729
      0730
      0731
      0732
      0733
      0734
      0735
      0736
      0737
      0738
      0739
      0740
      0741
      0742
      0743
      0744
      0745
      0746
      0747
      0748
      0749
      0750
      0751
      0752
      0753
      0754
      0755
      0756
      0757
      0758
      0759
      0760
      0761
      0762
      0763
      0764
      0765
      0766
      0767
      0768
      0769
      0770
      0771
      0772
      0773
      0774
      0775
      0776
      0777
      0778
      0779
      0780
      0781
      0782
      0783
      0784
      0785
      0786
      0787
      0788
      0789
      0790
      0791
      0792
      0793
      0794
      0795
      0796
      0797
      0798
      0799
      0800
      0801
      0802
      0803
      0804
      0805
      0806
      0807
      0808
      0809
      0810
      0811
      0812
      0813
      0814
      0815
      0816
      0817
      0818
      0819
      0820
      0821
      0822
      0823
      0824
      0825
      0826
      0827
      0828
      0829
      0830
      0831
      0832
      0833
      0834
      0835
      0836
      0837
      0838
      0839
      0840
      0841
      0842
      0843
      0844
      0845
      0846
      0847
      0848
      0849
      0850
      0851
      0852
      0853
      0854
      0855
      0856
      0857
      0858
      0859
      0860
      0861
      0862
      0863
      0864
      0865
      0866
      0867
      0868
      0869
      0870
      0871
      0872
      0873
      0874
      0875
      0876
      0877
      0878
      0879
      0880
      0881
      0882
      0883
      0884
      0885
      0886
      0887
      0888
      0889
      0890
      0891
      0892
      0893
      0894
      0895
      0896
      0897
      0898
      0899
      0900
      0901
      0902
      0903
      0904
      0905
      0906
      0907
      0908
      0909
      0910
      0911
      0912
      0913
      0914
      0915
      0916
      0917
      0918
      0919
      0920
      0921
      0922
      0923
      0924
      0925
      0926
      0927
      0928
      0929
      0930
      0931
      0932
      0933
      0934
      0935
      0936
      0937
      0938
      0939
      0940
      0941
      0942
      0943
      0944
      0945
      0946
      0947
      0948
      0949
      0950
      0951
      0952
      0953
      0954
      0955
      0956
      0957
      0958
      0959
      0960
      0961
      0962
      0963
      0964
      0965
      0966
      0967
      0968
      0969
      0970
      0971
      0972
      0973
      0974
      0975
      0976
      0977
      0978
      0979
      0980
      0981
      0982
      0983
      0984
      0985
      0986
      0987
      0988
      0989
      0990
      0991
      0992
      0993
      0994
      0995
      0996
      0997
      0998
      0999

```



```

F2AB 23      0559 HL      ;ELSE GO ON TO NEXT BYTE
F2AC 7C      0560 A,H
F2AD BB      0561 E
F2AE 20F4    0562 NZ,TEST3-$
F2B0 04      0563 B
F2B1 3E2B    0564 A,+
F2B3 CD15F4  0565 CALL OUTPUT
F2B6 28DD    0566 Z,TEST1-$
F2B8 C9      0567 RET
          0568 ;
          0569 ;
          0570 ;
F2B9 BE      0571 CHECK:
F2BA C8      0572 RET
F2BB F5      0573 PUSH
F2BC CDCE2   0574 CALL MDATA
F2BF CDCE3   0575 CALL PNEXT
F2C2 7368F75 0576 DEFM 'should='
          0577
F2C9 04      0577 DEFN
F2CA F1      0578 POP
F2CB C3D2F3  0579 JP
          0580 ;
          0581 ;
F2CE CDCE3   0582 MDATA:
F2D1 CDCE3   0583 CALL
F2D4 7E      0584 LD
F2D5 C3D2F3  0585 JP
          0586 ;
          0587 ;
          0588 ;
          0589 ;-- FILL MEMORY WITH CONSTANT COMMAND --
          0590 ;
F2D8 FE03    0591 FILL: CP 3
F2DA 37      0592 SCF
F2DB C0      0593 RET
F2DC 71      0594 FILL1: LD (HL),C
F2DD E5      0595 PUSH
F2DE B7      0596 DR
F2DF ED52    0597 SRC
F2E1 E1      0598 POP
F2E2 23      0599 INC
F2E3 3BF7    0600 JR
F2E5 C9      0601 RET
          0602 ;
          0603 ;
          0604 ;
          0605 ;
          0606 ;-- MEMORY BLOCK MOVE COMMAND --
          0607 ;
F2E6 FE03    0608 BLOCK: CP 3
F2E8 37      0609 SCF
F2E9 C0      0610 RET
F2EA CDCE3   0611 CALL BLOCAD
F2ED 79      0612 LD
F2EE B0      0613 DR
F2EF C8      0614 RET
F2F0 ED80    0615 LDIR
F2F2 C9      0616 RET
          0617 ;
          0618 ;
          0619 ;
F2F3 EB      0620 BLOCAD: EX DE,HL
F2F4 B7      0621 DR A
F2F5 ED52    0622 SBC HL,DE
          0623 ;
          0624 ;
          0625 ;
          0626 ;
          0627 ;
          0628 ;
          0629 ;
          0630 ;
          0631 ;
          0632 ;
          0633 ;
          0634 ;
          0635 ;
          0636 ;
          0637 ;
          0638 ;
          0639 ;
          0640 ;
          0641 ;
          0642 ;
          0643 ;
          0644 ;
          0645 ;
          0646 ;
          0647 ;
          0648 ;
          0649 ;
          0650 ;
          0651 ;
          0652 ;
          0653 ;
          0654 ;
          0655 ;
          0656 ;
          0657 ;
          0658 ;
          0659 ;
          0660 ;
          0661 ;
          0662 ;
          0663 ;
          0664 ;
          0665 ;
          0666 ;
          0667 ;
          0668 ;
          0669 ;
          0670 ;
          0671 ;
          0672 ;
          0673 ;
          0674 ;
          0675 ;
          0676 ;
          0677 ;
          0678 ;
          0679 ;
          0680 ;
          0681 ;
          0682 ;
          0683 ;
          0684 ;
          0685 ;
          0686 ;
          0687 ;
          0688 ;
          0689 ;
          0690 ;
          0691 ;
          0692 ;
          0693 ;
          0694 ;
          0695 ;
          0696 ;
          0697 ;
          0698 ;
          0699 ;
          0700 ;
          0701 ;
          0702 ;
          0703 ;
          0704 ;
          0705 ;
          0706 ;
          0707 ;
          0708 ;
          0709 ;
          0710 ;
          0711 ;
          0712 ;
          0713 ;
          0714 ;
          0715 ;
          0716 ;
          0717 ;
          0718 ;
          0719 ;
          0720 ;
          0721 ;
          0722 ;
          0723 ;
          0724 ;
          0725 ;
          0726 ;
          0727 ;
          0728 ;
          0729 ;
          0730 ;
          0731 ;
          0732 ;
          0733 ;
          0734 ;
          0735 ;
          0736 ;
          0737 ;
          0738 ;
          0739 ;
          0740 ;
          0741 ;
          0742 ;
          0743 ;
          0744 ;
          0745 ;
          0746 ;
          0747 ;
          0748 ;
          0749 ;
          0750 ;
          0751 ;
          0752 ;
          0753 ;
          0754 ;
          0755 ;
          0756 ;
          0757 ;
          0758 ;
          0759 ;
          0760 ;
          0761 ;
          0762 ;
          0763 ;
          0764 ;
          0765 ;
          0766 ;
          0767 ;
          0768 ;
          0769 ;
          0770 ;
          0771 ;
          0772 ;
          0773 ;
          0774 ;
          0775 ;
          0776 ;
          0777 ;
          0778 ;
          0779 ;
          0780 ;
          0781 ;
          0782 ;
          0783 ;
          0784 ;
          0785 ;
          0786 ;
          0787 ;
          0788 ;
          0789 ;
          0790 ;
          0791 ;
          0792 ;
          0793 ;
          0794 ;
          0795 ;
          0796 ;
          0797 ;
          0798 ;
          0799 ;
          0800 ;
          0801 ;
          0802 ;
          0803 ;
          0804 ;
          0805 ;
          0806 ;
          0807 ;
          0808 ;
          0809 ;
          0810 ;
          0811 ;
          0812 ;
          0813 ;
          0814 ;
          0815 ;
          0816 ;
          0817 ;
          0818 ;
          0819 ;
          0820 ;
          0821 ;
          0822 ;
          0823 ;
          0824 ;
          0825 ;
          0826 ;
          0827 ;
          0828 ;
          0829 ;
          0830 ;
          0831 ;
          0832 ;
          0833 ;
          0834 ;
          0835 ;
          0836 ;
          0837 ;
          0838 ;
          0839 ;
          0840 ;
          0841 ;
          0842 ;
          0843 ;
          0844 ;
          0845 ;
          0846 ;
          0847 ;
          0848 ;
          0849 ;
          0850 ;
          0851 ;
          0852 ;
          0853 ;
          0854 ;
          0855 ;
          0856 ;
          0857 ;
          0858 ;
          0859 ;
          0860 ;
          0861 ;
          0862 ;
          0863 ;
          0864 ;
          0865 ;
          0866 ;
          0867 ;
          0868 ;
          0869 ;
          0870 ;
          0871 ;
          0872 ;
          0873 ;
          0874 ;
          0875 ;
          0876 ;
          0877 ;
          0878 ;
          0879 ;
          0880 ;
          0881 ;
          0882 ;
          0883 ;
          0884 ;
          0885 ;
          0886 ;
          0887 ;
          0888 ;
          0889 ;
          0890 ;
          0891 ;
          0892 ;
          0893 ;
          0894 ;
          0895 ;
          0896 ;
          0897 ;
          0898 ;
          0899 ;
          0900 ;
          0901 ;
          0902 ;
          0903 ;
          0904 ;
          0905 ;
          0906 ;
          0907 ;
          0908 ;
          0909 ;
          0910 ;
          0911 ;
          0912 ;
          0913 ;
          0914 ;
          0915 ;
          0916 ;
          0917 ;
          0918 ;
          0919 ;
          0920 ;
          0921 ;
          0922 ;
          0923 ;
          0924 ;
          0925 ;
          0926 ;
          0927 ;
          0928 ;
          0929 ;
          0930 ;
          0931 ;
          0932 ;
          0933 ;
          0934 ;
          0935 ;
          0936 ;
          0937 ;
          0938 ;
          0939 ;
          0940 ;
          0941 ;
          0942 ;
          0943 ;
          0944 ;
          0945 ;
          0946 ;
          0947 ;
          0948 ;
          0949 ;
          0950 ;
          0951 ;
          0952 ;
          0953 ;
          0954 ;
          0955 ;
          0956 ;
          0957 ;
          0958 ;
          0959 ;
          0960 ;
          0961 ;
          0962 ;
          0963 ;
          0964 ;
          0965 ;
          0966 ;
          0967 ;
          0968 ;
          0969 ;
          0970 ;
          0971 ;
          0972 ;
          0973 ;
          0974 ;
          0975 ;
          0976 ;
          0977 ;
          0978 ;
          0979 ;
          0980 ;
          0981 ;
          0982 ;
          0983 ;
          0984 ;
          0985 ;
          0986 ;
          0987 ;
          0988 ;
          0989 ;
          0990 ;
          0991 ;
          0992 ;
          0993 ;
          0994 ;
          0995 ;
          0996 ;
          0997 ;
          0998 ;
          0999 ;
          1000 ;
          1001 ;
          1002 ;
          1003 ;
          1004 ;
          1005 ;
          1006 ;
          1007 ;
          1008 ;
          1009 ;
          1010 ;
          1011 ;
          1012 ;
          1013 ;
          1014 ;
          1015 ;
          1016 ;
          1017 ;
          1018 ;
          1019 ;
          1020 ;
          1021 ;
          1022 ;
          1023 ;
          1024 ;
          1025 ;
          1026 ;
          1027 ;
          1028 ;
          1029 ;
          1030 ;
          1031 ;
          1032 ;
          1033 ;
          1034 ;
          1035 ;
          1036 ;
          1037 ;
          1038 ;
          1039 ;
          1040 ;
          1041 ;
          1042 ;
          1043 ;
          1044 ;
          1045 ;
          1046 ;
          1047 ;
          1048 ;
          1049 ;
          1050 ;
          1051 ;
          1052 ;
          1053 ;
          1054 ;
          1055 ;
          1056 ;
          1057 ;
          1058 ;
          1059 ;
          1060 ;
          1061 ;
          1062 ;
          1063 ;
          1064 ;
          1065 ;
          1066 ;
          1067 ;
          1068 ;
          1069 ;
          1070 ;
          1071 ;
          1072 ;
          1073 ;
          1074 ;
          1075 ;
          1076 ;
          1077 ;
          1078 ;
          1079 ;
          1080 ;
          1081 ;
          1082 ;
          1083 ;
          1084 ;
          1085 ;
          1086 ;
          1087 ;
          1088 ;
          1089 ;
          1090 ;
          1091 ;
          1092 ;
          1093 ;
          1094 ;
          1095 ;
          1096 ;
          1097 ;
          1098 ;
          1099 ;
          1100 ;
          1101 ;
          1102 ;
          1103 ;
          1104 ;
          1105 ;
          1106 ;
          1107 ;
          1108 ;
          1109 ;
          1110 ;
          1111 ;
          1112 ;
          1113 ;
          1114 ;
          1115 ;
          1116 ;
          1117 ;
          1118 ;
          1119 ;
          1120 ;
          1121 ;
          1122 ;
          1123 ;
          1124 ;
          1125 ;
          1126 ;
          1127 ;
          1128 ;
          1129 ;
          1130 ;
          1131 ;
          1132 ;
          1133 ;
          1134 ;
          1135 ;
          1136 ;
          1137 ;
          1138 ;
          1139 ;
          1140 ;
          1141 ;
          1142 ;
          1143 ;
          1144 ;
          1145 ;
          1146 ;
          1147 ;
          1148 ;
          1149 ;
          1150 ;
          1151 ;
          1152 ;
          1153 ;
          1154 ;
          1155 ;
          1156 ;
          1157 ;
          1158 ;
          1159 ;
          1160 ;
          1161 ;
          1162 ;
          1163 ;
          1164 ;
          1165 ;
          1166 ;
          1167 ;
          1168 ;
          1169 ;
          1170 ;
          1171 ;
          1172 ;
          1173 ;
          1174 ;
          1175 ;
          1176 ;
          1177 ;
          1178 ;
          1179 ;
          1180 ;
          1181 ;
          1182 ;
          1183 ;
          1184 ;
          1185 ;
          1186 ;
          1187 ;
          1188 ;
          1189 ;
          1190 ;
          1191 ;
          1192 ;
          1193 ;
          1194 ;
          1195 ;
          1196 ;
          1197 ;
          1198 ;
          1199 ;
          1200 ;
          1201 ;
          1202 ;
          1203 ;
          1204 ;
          1205 ;
          1206 ;
          1207 ;
          1208 ;
          1209 ;
          1210 ;
          1211 ;
          1212 ;
          1213 ;
          1214 ;
          1215 ;
          1216 ;
          1217 ;
          1218 ;
          1219 ;
          1220 ;
          1221 ;
          1222 ;
          1223 ;
          1224 ;
          1225 ;
          1226 ;
          1227 ;
          1228 ;
          1229 ;
          1230 ;
          1231 ;
          1232 ;
          1233 ;
          1234 ;
          1235 ;
          1236 ;
          1237 ;
          1238 ;
          1239 ;
          1240 ;
          1241 ;
          1242 ;
          1243 ;
          1244 ;
          1245 ;
          1246 ;
          1247 ;
          1248 ;
          1249 ;
          1250 ;
          1251 ;
          1252 ;
          1253 ;
          1254 ;
          1255 ;
          1256 ;
          1257 ;
          1258 ;
          1259 ;
          1260 ;
          1261 ;
          1262 ;
          1263 ;
          1264 ;
          1265 ;
          1266 ;
          1267 ;
          1268 ;
          1269 ;
          1270 ;
          1271 ;
          1272 ;
          1273 ;
          1274 ;
          1275 ;
          1276 ;
          1277 ;
          1278 ;
          1279 ;
          1280 ;
          1281 ;
          1282 ;
          1283 ;
          1284 ;
          1285 ;
          1286 ;
          1287 ;
          1288 ;
          1289 ;
          1290 ;
          1291 ;
          1292 ;
          1293 ;
          1294 ;
          1295 ;
          1296 ;
          1297 ;
          1298 ;
          1299 ;
          1300 ;
          1301 ;
          1302 ;
          1303 ;
          1304 ;
          1305 ;
          1306 ;
          1307 ;
          1308 ;
          1309 ;
          1310 ;
          1311 ;
          1312 ;
          1313 ;
          1314 ;
          1315 ;
          1316 ;
          1317 ;
          1318 ;
          1319 ;
          1320 ;
          1321 ;
          1322 ;
          1323 ;
          1324 ;
          1325 ;
          1326 ;
          1327 ;
          1328 ;
          1329 ;
          1330 ;
          1331 ;
          1332 ;
          1333 ;
          1334 ;
          1335 ;
          1336 ;
          1337 ;
          1338 ;
          1339 ;
          1340 ;
          1341 ;
          1342 ;
          1343 ;
          1344 ;
          1345 ;
          1346 ;
          1347 ;
          1348 ;
          1349 ;
          1350 ;
          1351 ;
          1352 ;
          1353 ;
          1354 ;
          1355 ;
          1356 ;
          1357 ;
          1358 ;
          1359 ;
          1360 ;
          1361 ;
          1362 ;
          1363 ;
          1364 ;
          1365 ;
          1366 ;
          1367 ;
          1368 ;
          1369 ;
          1370 ;
          1371 ;
          1372 ;
          1373 ;
          1374 ;
          1375 ;
          1376 ;
          1377 ;
          1378 ;
          1379 ;
          1380 ;
          1381 ;
          1382 ;
          1383 ;
          1384 ;
          1385 ;
          1386 ;
          1387 ;
          1388 ;
          1389 ;
          1390 ;
          1391 ;
          1392 ;
          1393 ;
          1394 ;
          1395 ;
          1396 ;
          1397 ;
          1398 ;
          1399 ;
          1400 ;
          1401 ;
          1402 ;
          1403 ;
          1404 ;
          1405 ;
          1406 ;
          1407 ;
          1408 ;
          1409 ;
          1410 ;
          1411 ;
          1412 ;
          1413 ;
          1414 ;
          1415 ;
          1416 ;
          1417 ;
          1418 ;
          1419 ;
          1420 ;
          1421 ;
          1422 ;
          1423 ;
          1424 ;
          1425 ;
          1426 ;
          1427 ;
          1428 ;
          1429 ;
          1430 ;
          1431 ;
          1432 ;
          1433 ;
          1434 ;
          1435 ;
          1436 ;
          1437 ;
          1438 ;
          1439 ;
          1440 ;
          1441 ;
          1442 ;
          1443 ;
          1444 ;
          1445 ;
          1446 ;
          1447 ;
          1448 ;
          1449 ;
          1450 ;
          1451 ;
          1452 ;
          1453 ;
          1454 ;
          1455 ;
          1456 ;
          1457 ;
          1458 ;
          1459 ;
          1460 ;
          1461 ;
          1462 ;
          1463 ;
          1464 ;
          1465 ;
          1466 ;
          1467 ;
          1468 ;
          1469 ;
          1470 ;
          1471 ;
          1472 ;
          1473 ;
          1474 ;
          1475 ;
          1476 ;
          1477 ;
          1478 ;
          1479 ;
          1480 ;
          1481 ;
          1482 ;
          1483 ;
          1484 ;
          1485 ;
          1486 ;
          1487 ;
          1488 ;
          1489 ;
          1490 ;
          1491 ;
          1492 ;
          1493 ;
          1494 ;
          1495 ;
          1496 ;
          1497 ;
          1498 ;
          1499 ;
          1500 ;
          1501 ;
          1502 ;
          1503 ;
          1504 ;
          1505 ;
          1506 ;
          1507 ;
          1508 ;
          1509 ;
          1510 ;
          1511 ;
          1512 ;
          1513 ;
          1514 ;
          1515 ;
          1516 ;
          1517 ;
          1518 ;
          1519 ;
          1520 ;
          1521 ;
          1522 ;
          1523 ;
          1524 ;
          1525 ;
          1526 ;
          1527 ;
          1528 ;
          1529 ;
          1530 ;
          1531 ;
          1532 ;
          1533 ;
          1534 ;
          1535 ;
          1536 ;
          1537 ;
          1538 ;
          1539 ;
          1540 ;
          1541 ;
          1542 ;
          1543 ;
          1544 ;
          1545 ;
          1546 ;
          1547 ;
          1548 ;
          1549 ;
          1550 ;
          1551 ;
          1552 ;
          1553 ;
          1554 ;
          1555 ;
          1556 ;
          1557 ;
          1558 ;
          1559 ;
          1560 ;
          1561 ;
          1562 ;
          1563 ;
          1564 ;
          1565 ;
          1566 ;
          1567 ;
          1568 ;
          1569 ;
          1570 ;
          1571 ;
          1572 ;
          1573 ;
          1574 ;
          1575 ;
          1576 ;
          1577 ;
          1578 ;
          1579 ;
          1580 ;
          1581 ;
          1582 ;
          1583 ;
          1584 ;
          1585 ;
          1586 ;
          1587 ;
          1588 ;
          1589 ;
          1590 ;
          1591 ;
          1592 ;
          1593 ;
          1594 ;
          1595 ;
          1596 ;
          1597 ;
          1598 ;
          1599 ;
          1600 ;
          1601 ;
          1602 ;
          1603 ;
          1604 ;
          1605 ;
          1606 ;
          1607 ;
          1608 ;
          1609 ;
          1610 ;
          1611 ;
          1612 ;
          1613 ;
          1614 ;
          1615 ;
          1616 ;
          1617 ;
          1618 ;
          1619 ;
          1620 ;
          1621 ;
          1622 ;
          1623 ;
          1624 ;
          1625 ;
          1626 ;
          1627 ;
          1628 ;
          1629 ;
          1630 ;
          1631 ;
          1632 ;
          1633 ;
          1634 ;
          1635 ;
          1636 ;
          1637 ;
          1638 ;
          1639 ;
          1640 ;
          1641 ;
          1642 ;
          1643 ;
          1644 ;
          1645 ;
          1646 ;
          1647 ;
          1648 ;
          1649 ;
          1650 ;
          1651 ;
          1652 ;
          1653 ;
          1654 ;
          1655 ;
          1656 ;
          1657 ;
          1658 ;
          1659 ;
          1660 ;
          1661 ;
          1662 ;
          1663 ;
          1664 ;
          1665 ;
          1666 ;
          1667 ;
          1668 ;
          1669 ;
          1670 ;
          1671 ;
          1672 ;
          1673 ;
          1674 ;
          1675 ;
          1676 ;
          1677 ;
          1678 ;
          1679 ;
          1680 ;
          1681 ;
          1682 ;
          1683 ;
          1684 ;
          1685 ;
          1686 ;
          1687 ;
          1688 ;
          1689 ;
          1690 ;
          1691 ;
          1692 ;
          1693 ;
          1694 ;
          1695 ;
          1696 ;
          1697 ;
          1698 ;
          1699 ;
          1700 ;
          1701 ;
          1702 ;
          1703 ;
          1704 ;
          1705 ;
          1706 ;
          1707 ;
          1708 ;
          1709 ;
          1710 ;
          1711 ;
          1712 ;
          1713 ;
          1714 ;
          1715 ;
          1716 ;
          1717 ;
          1718 ;
          1719 ;
          1720 ;
          1721 ;
          1722 ;
          1723 ;
          1724 ;
          1725 ;
          1726 ;
          1727 ;
          1728 ;
          1729 ;
          1730 ;
          1731 ;
          1732 ;
          1733 ;
          1734 ;
          1735 ;
          1736 ;
          1737 ;
          1738 ;
          1739 ;
          1740 ;
          1741 ;
          1742 ;
          1743 ;
          1744 ;
          1745 ;
          1746 ;
          1747 ;
          1748 ;
          1749 ;
          1750 ;
          1751 ;
          1752 ;
          1753 ;
          1754 ;
          1755 ;
          1756 ;
          1757 ;
          1758 ;
          1759 ;
          1760 ;
          1761 ;
          1762 ;
          1763 ;
          1764 ;
          1765 ;
          1766 ;
          1767 ;
          1768 ;
          1769 ;
          1770 ;
          1771 ;
          1772 ;
          1773 ;
          1774 ;
          1775 ;
          1776 ;
          1777 ;
          1778 ;
          1779 ;
          1780 ;
          1781 ;
          1782 ;
          1783 ;
          1784 ;
          1785 ;
          1786 ;
          1787 ;
          1788 ;
          1789 ;
          1790 ;
          1791 ;
          1792 ;
          1793 ;
          1794 ;
          1795 ;
          1796 ;
          1797 ;
          1798 ;
          1799 ;
          1800 ;
          1801 ;
          1802 ;
          1803 ;
          1804 ;
          1805 ;
          1806 ;
          1807 ;
          1808 ;
          1809 ;
          1810 ;
          1811 ;
          1812 ;
          1813 ;
          1814 ;
          1815 ;
          1816 ;
          1817 ;
          1818 ;
          1819 ;
          1820 ;
          1821 ;
          1822 ;
          1823 ;
          1824 ;
          1825 ;
          1826 ;
          1827 ;
          1828 ;
          1829 ;
          1830 ;
          1831 ;
          1832 ;
          1833 ;
          1834 ;
          1835 ;
          1836 ;
          1837 ;
          1838 ;
          1839 ;
          1840 ;
          1841 ;
          1842 ;
          1843 ;
          1844 ;
          1845 ;
          1846 ;
          1847 ;
          1848 ;
          1849 ;
          1850 ;
          1851 ;
          1852 ;
          1853 ;
          1854 ;
          1855 ;
          1856 ;
          1857 ;
          1858 ;
          1859 ;
          1860 ;
          1861 ;
          1862 ;
          1863 ;
          1864 ;
          1865 ;
          1866 ;
          1867 ;
          1868 ;
          1869 ;
          1870 ;
          1871 ;
          1872 ;
          1873 ;
          1874 ;
          1875 ;
          1876 ;
          1877 ;
          1878 ;
          1879 ;
          1880 ;
          1881 ;
          1882 ;
          1883 ;
          1884 ;
          1885 ;
          1886 ;
          1887 ;
          1888 ;
          1889 ;
          1890 ;
          1891 ;
          1892 ;
          1893 ;
          1894 ;
          1895 ;
          1896 ;
          1897 ;
          1898 ;
          1899 ;
          1900 ;
          1901 ;
          1902 ;
          1903 ;
          1904 ;
          1905 ;
          1906 ;
          1907 ;
          1908 ;
          1909 ;
          1910 ;
          1911 ;
          1912 ;
          1913 ;
          1914 ;
          1915 ;
          1916 ;
          1917 ;
          1918 ;
          1919 ;
          1920 ;
          1921 ;
          1922 ;
          1923 ;
          1924 ;
          1925 ;
          1926 ;
          1927 ;
          1928 ;
          1929 ;
          1930 ;
          1931 ;
          1932 ;
          1933 ;
          1934 ;
          1935 ;
          1936 ;
          1937 ;
          1938 ;
          1939 ;
          1940 ;
          1941 ;
          1942 ;
          1943 ;
          1944 ;
          1945 ;
          1946 ;
          1947 ;
          1948 ;
          1949 ;
          1950 ;
          1951 ;
          1952 ;
          1953 ;
          1954 ;
          1955 ;
          1956 ;
          1957 ;
          1958 ;
          1959 ;
          1960 ;
          1961 ;
          1962 ;
          1963 ;
          1964 ;
          1965 ;
          1966 ;
          1967 ;
          1968 ;
          1969 ;
          1970 ;
          1971 ;
          1972 ;
          1973 ;
          1974 ;
          1975 ;
          1976 ;
          1977 ;
          1978 ;
          1979 ;
          1980 ;
          1981 ;
          1982 ;
          1983 ;
          1984 ;
          1985 ;
          1986 ;
          1987 ;
          1988 ;
          1989 ;
          1990 ;
          1991 ;
          1992 ;
          1993 ;
          1994 ;
          1995 ;
          1996 ;
          1997 ;
          1998 ;
          1999 ;
          2000 ;
          2001 ;
          2002 ;
          2003 ;
          2004 ;
          2005 ;
          2006 ;
          2007 ;
          2008 ;
          2009 ;
          2010 ;
          2011 ;
          2012 ;
          2013 ;
          2014 ;
          2015 ;
          2016 ;
          2017 ;
          2018 ;
          2019 ;
          2020 ;
          2021 ;
          2022 ;
          2023 ;
          2024 ;
          2025 ;
          2026 ;
          2027 ;
          2028 ;
          2029 ;
          2030 ;
          2031 ;
          2032 ;
          2033 ;
          2034 ;
          2035 ;
          2036 ;
          2037 ;
          2038 ;
          2039 ;
          2040 ;
          2041 ;
          2042 ;
          2043 ;
          2044 ;
          2045 ;
          2046 ;
          2047 ;
          2048 ;
          2049 ;
          2050 ;
          2051 ;
          2052 ;
          2053 ;
          2054 ;
          205
```


SUBSCRIPTION FORM

(It's OK to brag!)

- I own a big board (Hooray!)
 I don't own a Big Board but am very interested (There's hope)

	EXPERTISE Guru=5 Novice=0	INTEREST Fanatic=5 None=0
Software Systems	<input type="checkbox"/>	<input type="checkbox"/>
Software Applications	<input type="checkbox"/>	<input type="checkbox"/>
Languages 1. _____	<input type="checkbox"/>	<input type="checkbox"/>
2. _____	<input type="checkbox"/>	<input type="checkbox"/>
3. _____	<input type="checkbox"/>	<input type="checkbox"/>
Hardware	<input type="checkbox"/>	<input type="checkbox"/>

Are you willing to be a resource in the areas where your expertise is 4 or 5?

- love to
probably
maybe
no

How are you using the Big Board?

- Home System
Business System
Software Development
OEM
Education
Other _____

What kinds of information do you need right now?

What are your hardware/software needs now?

In the near future? _____

What kind of exciting adventure (misadventure) are you working on? _____

If you get the idea that this document is as interested in enlisting your aid and ideas as it is in getting a subscription, you're right. Lots of people are willing to subscribe, lots of people have ideas - and we'd like to encourage lots of people (especially you) to take an hour or two and put ideas and needs and accomplishments down on paper or disk. Then we can pass them along to others and that's what this journal is all about.

Send me six issues (1 yr.) of MICRO CORNUCOPIA. I understand that I can cancel at any time and receive a refund for the balance of the subscription. (Issue #1 was published in August 1981.)

U.S.

- \$16.00
 \$20.00 (1st class mail)
 Back issues, Specify #s _____
\$3.00 each

Canada & Mexico

- \$20.00 (U.S. funds)
 Back issues, Specify #s _____
\$3.00 each (U.S. funds)

Other Foreign

- \$26.00 (U.S. funds)
 Back issues, Specify #s _____
\$5.00 each (U.S. funds)


NAME _____ PHONE (?) _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

Renewal

MICRO CORNUCOPIA • 11740 N.W. West Rd • Portland, Oregon • 97229

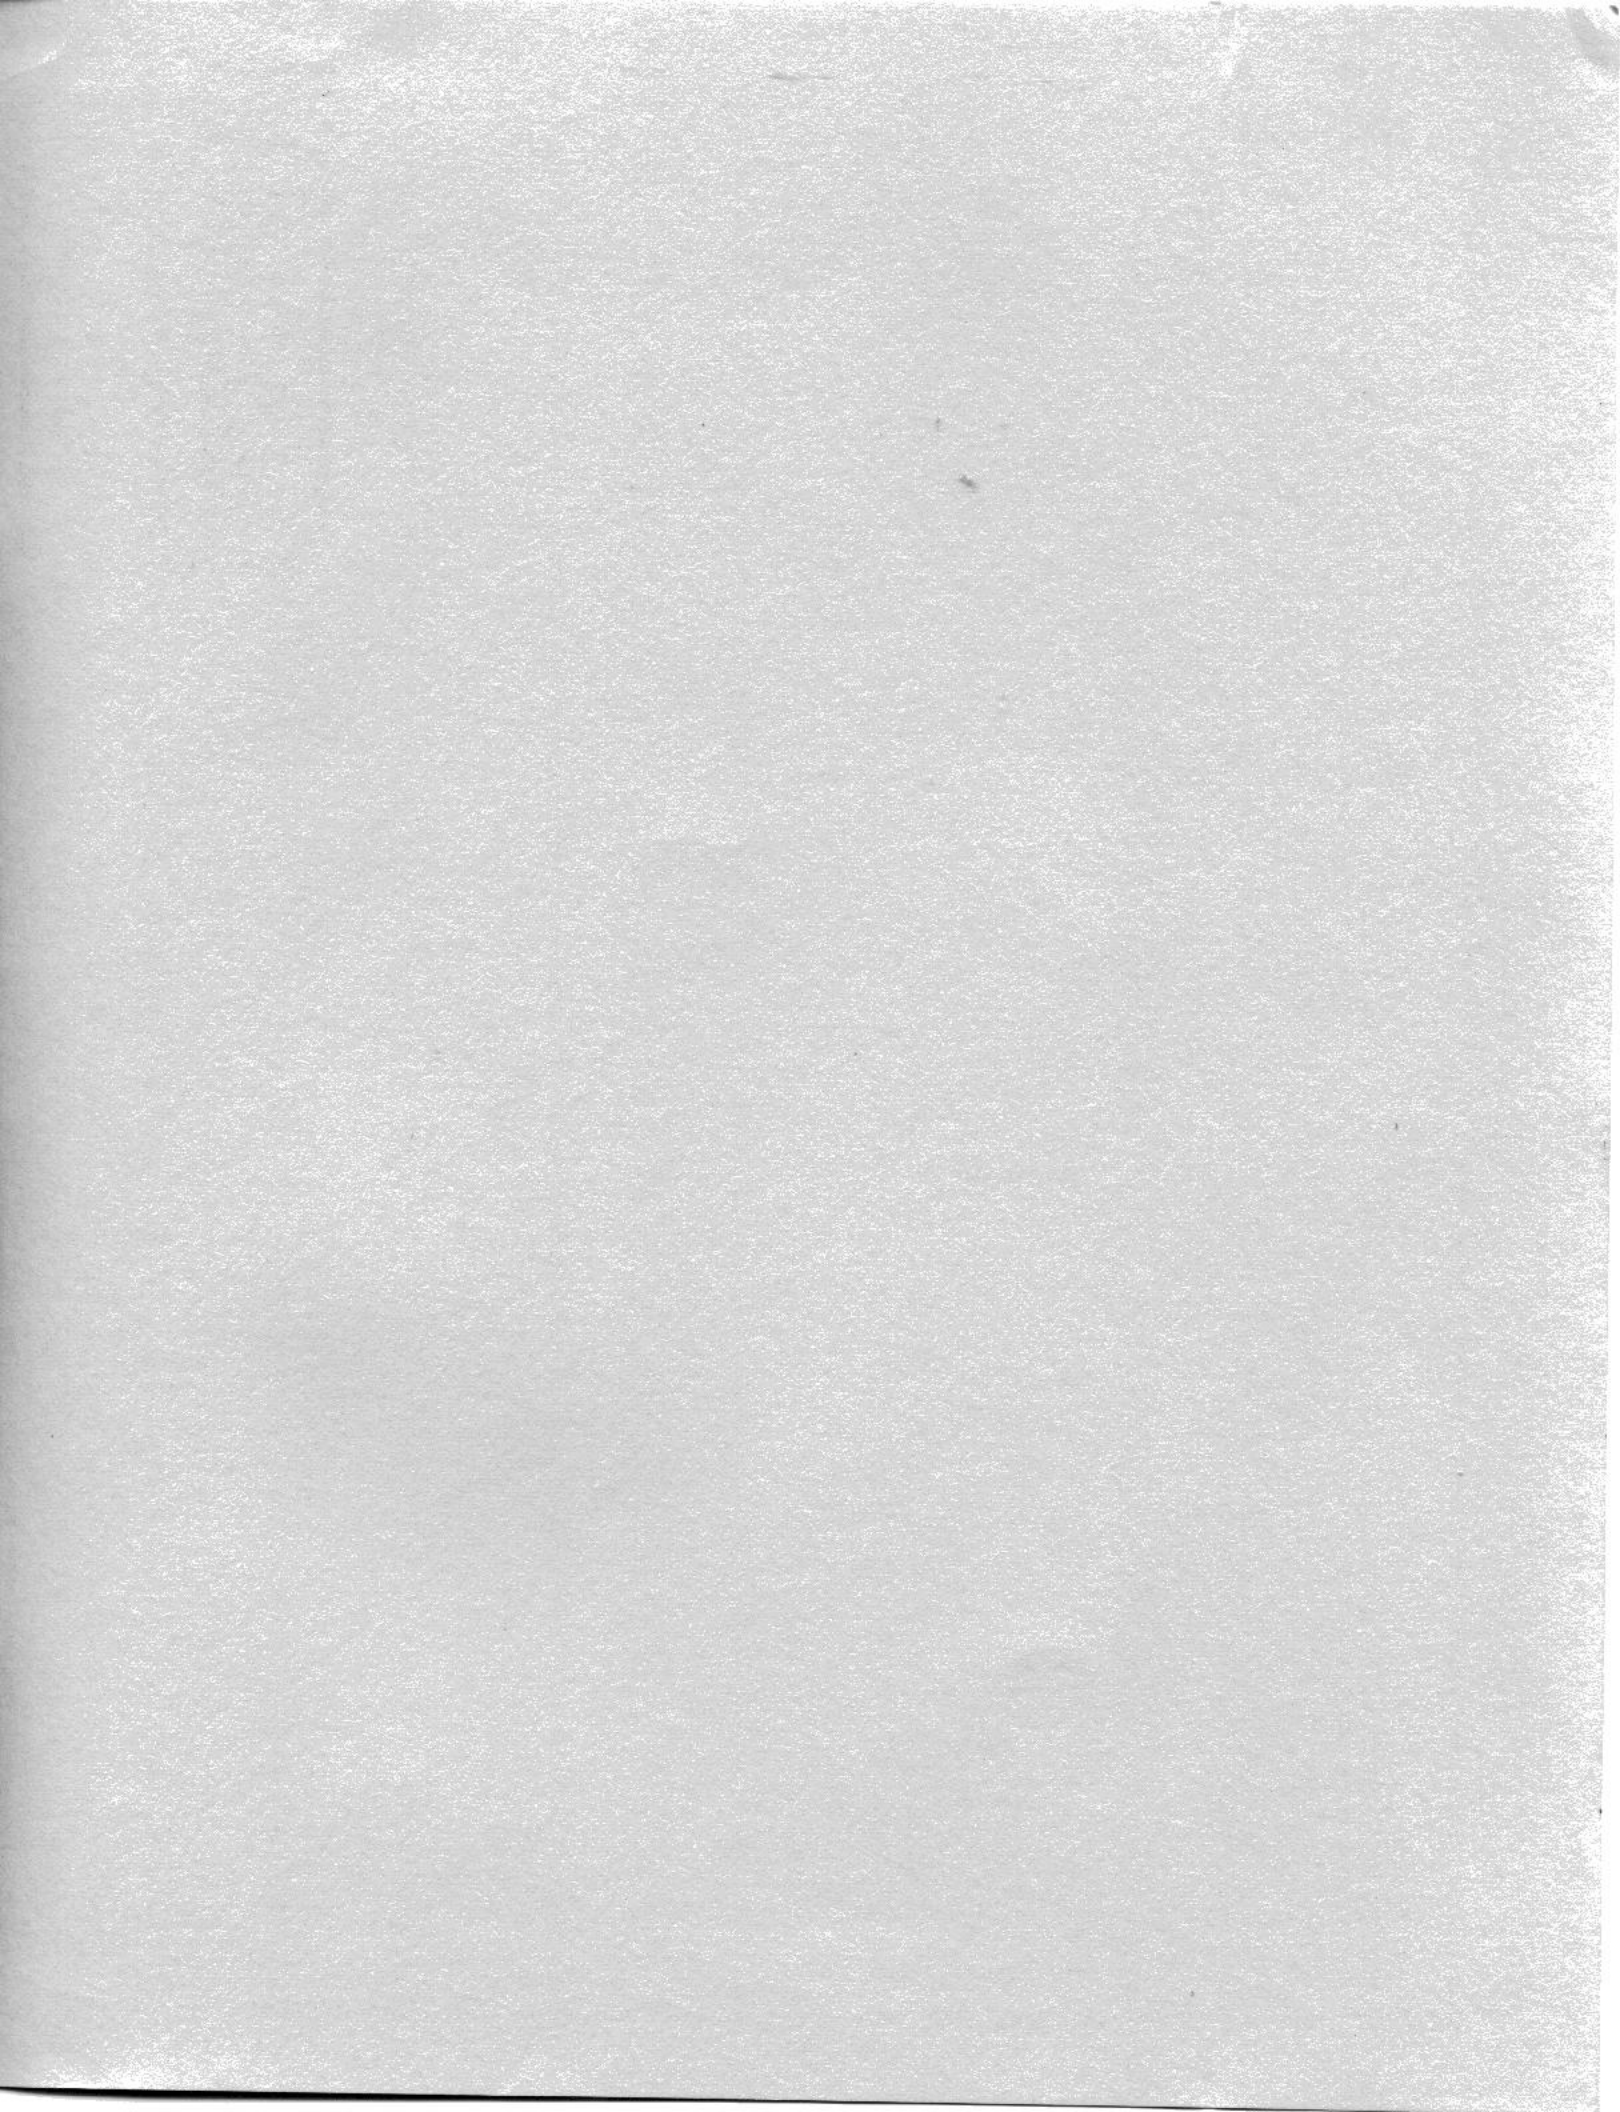

MICRO CORNUCOPIA
Journal of the Big Board Users Group

P. O. BOX 223
BEND, OREGON 97709